

PM1000 ANALOGUE SERIES



- DESKTOP PAGING MICROPHONE | **PM1000**
- 6 CH DESKTOP PAGING MICROPHONE | **PM1060**
- 12 CH DESKTOP PAGING MICROPHONE | **PM1120**



PM1000 series are available in three variants and had been serving many installations faithfully since its creation. They are available as simple paging mic with chime to those with 6 or 12 zone selections. They are most suitable for simple and small size installations of less than 12 zones in total.



**FEATURES -**

- Condenser gooseneck microphone with illuminated ring
- Pre and post announcement 4 tone chime
- Adjustable chime and mic volume with balance mic / line output level
- Output level selection to mic or line signal to suit the input type of the pre-amplifier mixer
- Dry contact available when mic is active (PM1000 only)
- 6 or 12 zone selection for PM1060 and PM1120


**TECHNICAL SPECIFICATIONS -**

|                      |  |
|----------------------|--|
| Power requirement    | PM1000 : 24V DC adaptor<br>PM1060 / 1120 : 24V DC via D9 conn. |
| Power consumption    | 50 mA / 150 mA / 150 mA  |
| Zone selection       | PM1000 - ALL CALL<br>PM1060 / 1120 - 6 and 12 zones w ALL CALL |
| Microphone           | Condenser mic ; cardioid                                       |
| Output impedance     | 600 Ohm  |
| Output level         | 1.2 V (line output) / balanced mic (775 mV )                   |
| Output dry contact   | 3 A normally open (PM1000 only)                                |
| Output controls      | Chime and mic level  |
| Audio connection     | 1/4 " stereo phone jack  |
| Switching connection | D15 connector (PM1060 / 1120 only)                             |
| Operating distance   | 300 m (recommended)  |
| Chime                | 4 tone up and 4 tone down                                      |
| Indicators           | Mic ring, zone switch, ALL CALL                                |
| Frequency response   | 100 ~ 12 KHz (+/- 3dB ; 0 dB out)                              |
| S/N ratio            | > 60 dB  |
| Gooseneck mic length | 400 mm   |
| Dimensions (WxHxD)   | 150 x 62 x 186 mm  |
| Weight (kg)          | 800 / 800 / 850 gms  |

**APPLICATION SCHEMATIC -**

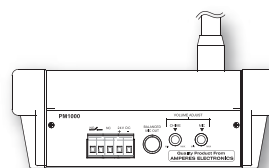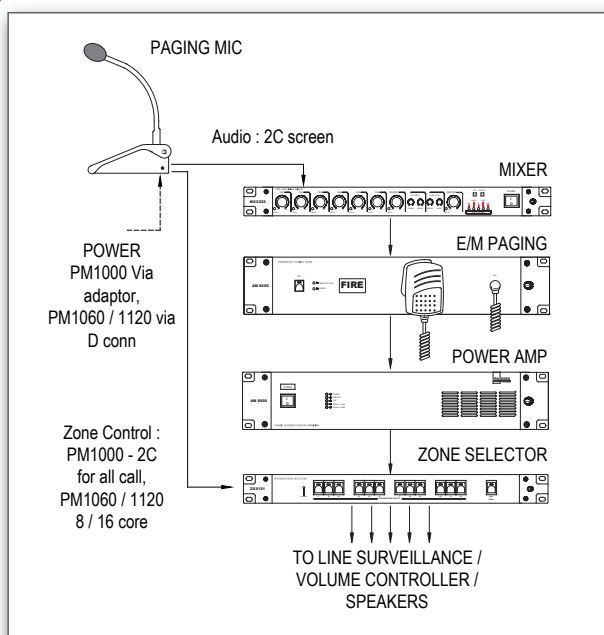

Rear View Of PM1000

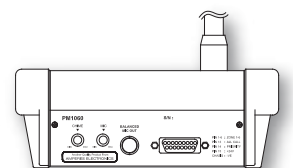

Rear View Of PM1060 / PM1120

**Packing information**

- Qty per carton : 1 unit
- W x H x D : 512 x 83 x 288 mm
- Weight : PM 1000 - 1.5 kg ( incl adaptor )
- : PM 1060 - 1.15 kg
- : PM 1120 - 1.2 kg