

### Introduction

SG320 is ideal for installation gardens, blend perfectly to the environment with its greenish finishing and delivering high quality sound reproduction. Its housing is constructed using outdoor resistance material which is subjected to intense heat and water splashing.


### Technical Specification

|                           | SG320                     |
|---------------------------|---------------------------|
| Power rating              | 20W 100V line             |
| Power tapping (100V line) | 10 / 20W                  |
| Speaker diameter          | 5" (125mm)                |
| Speaker type              | Co - axial                |
| Primary impedance         | 1K / 500 Ohm              |
| Frequency response        | 70Hz - 16 KHz             |
| SPL (1w/m @ 1 kHz)        | 84 dB                     |
| Construction material     | ABS                       |
| Colour                    | Green                     |
| Dimensions (mm)           | 320 dia x 350 height (mm) |
| Weight (kg)               | 3.6 kg                    |

### Installation Guide

#### 1 Prepare the base for installation

The base shall be flat with minimum dimensions shown. It can be installed anywhere in the garden area including shallow flood prone area.

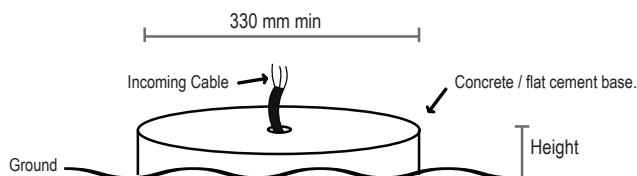


#### 3 Terminate the incoming cable

Connect incoming cable to speaker with proper wattage required:


Yellow - Brown = 20W  
Yellow - Blue = 10W

Seal the connection with appropriate tape / sealant to avoid corrosion.

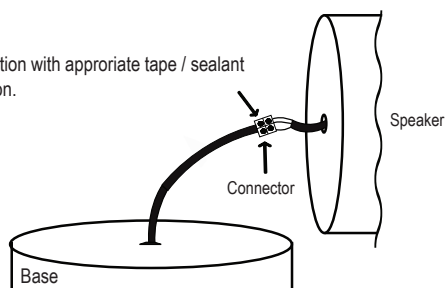

#### 2 Mount the speaker bracket

The bracket shall be mounted to the base with 90° angle to each other.

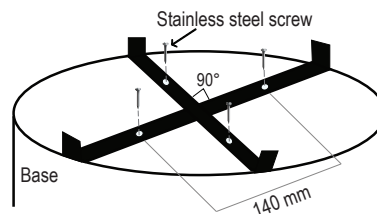

#### 4 Final speaker installation

Mount the speaker enclosure to the bracket using stainless steel screws.

