

BS508 5" 10W 100V Vandal Proof

BS506 5" 6W 100V

BS410 4" 10W 100V

DV410 4" 6W 100V



DV410 4" 6W 100V

DV410 is a favorite for its classic outlooks, suitable for small area installations such as staircases, offices and can be mounted vertical or horizontally. It is driven by 4" driver of 6W 100V with power taps of 1,3 and 6W.

Packing information

Carton : 460 (L) x 420 (W) x 410 (H) mm
Gross weight : 16.70 kg
20 units per carton



BS506 5" 6W 100V

BS506 is driven by 5" dual cone driver with power taps of 1,3,6W 100V. The enclosure is fully ABS thus eliminating the risk of rust for high humidity environment. Suitable for installations at walkways, staircases etc.

Packing information

Carton : 550 (L) x 400 (W) x 180 (H) mm
Gross weight : 10 kg
12 units per carton




BS508 5" 10W 100V

It is powered by 5" dual cone driver with nominal power of 10W 100V line, available power taps are 1,3,6 and 10W. It is slimmer for better looks and has installation method which prevents vandalism.

Suitable for various wall installations with optimum delivery for both BGM and EVAC systems

Packing information

Carton : 460 (L) x 460 (W) x 320 (H) mm
Gross weight : 22.25 kg
24 units per carton

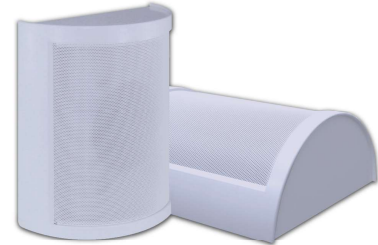

BS410 - 4" 10W 100V

Available in white and is suitable for installations in small areas, staircases, etc. It is driven by 4" dual cone driver with power taps of 1,3,6 and 10W 100V, providing clarity of voice announcements as required in EVAC systems.

Packing information

Carton : 460 (L) x 420 (W) x 410 (H) mm
Gross weight : 16.70 kg
20 units per carton

Technical Specifications

	BS508	BS506	BS410	DV410
SPEAKER				
Power rating	10W 100V	6W 100V	10W 100V	6W 100V
Diameter	5"		4"	
Cone type	Dual cone			
Impedance (Ohm)	8			
Freq response @1kHz +/- 3dB	120 ~ 18 kHz	100 ~ 15 kHz	100 ~ 16 kHz	100 ~ 18 kHz
SPL @ 1W / m (+/- 3dB) 1 kHz	94 dB	93 dB	92 dB	90 dB
TRANSFORMER				
Tapping (100V line)	1 / 3 / 6 / 10W	1 / 3 / 6W	1 / 3 / 6 / 10W	1 / 3 / 6W
Primary impedance (Ohm)	10k / 3.3k / 1.6k / 1k	10k / 3.3k / 1.6k	10k / 3.3k / 1.6k / 1k	10k / 3.3k / 1.6k
Secondary impedance (Ohm)	8			
PHYSICAL				
Grille / enclosure	Metal / ABS	ABS Plastic	Metal / ABS	
Overall size (W x H x D)	220 x 130 x 70 mm	172 x 195 x 105 mm	185 x 215 x 90 mm	195 x 215 x 105 mm
Weight	720 g	780 g	760 g	740 g
Colour	White			

