

Introduction

PMX II is software that consists of virtual hardware components such as Music Player, Music Storage, Programmable Timer, Message Player and Paging Station. It is a standalone version and runs on PC with operating system of Windows 8 and above. With a converter as dongle, the audio and control outputs from PC shall be fed to conventional PA rack, enriching the entire installation to a more sophisticated setup.



The user interface had been made to be user friendly, enabling smoother setup and viewing. The system shall be able to integrate freely with existing equipment such as zone decoders, paging microphones with different priority level and emergency paging panel which the activities would be monitored in the screen.

Among suitable installations includes offices, transportation stations, malls, hotels, schools, etc.


Features

- ▶ Media playback module to feed BGM audio to PA system for MP3, WAV or other supported audio files by Windows Media Player.
- ▶ Media Library to store unlimited songs, messages, tones or chimes in HDD for playback
- ▶ Weekly programmable timer allows repetitive playback of tones or chimes
- ▶ Calendar scheduling to playback songs such as birthday songs
- ▶ Controls up to 256 zones which is linked to external zone selector such as ZS5121 via TD6240
- ▶ Zone configuration allows naming each zone to specific name and assignable as Normal or Emergency zone.
- ▶ Paging or messaging to zone or groups of zones, with priority overriding for Emergency Call


Application Schematic

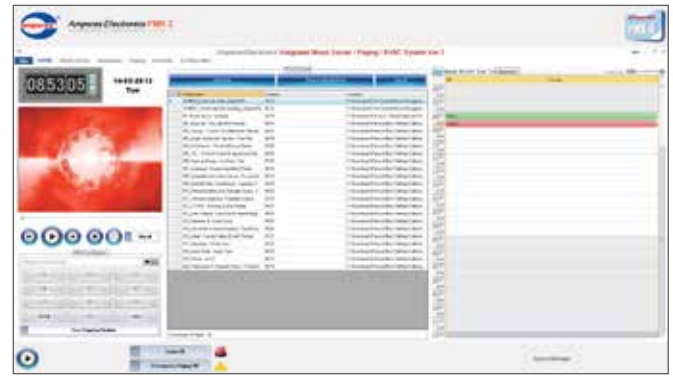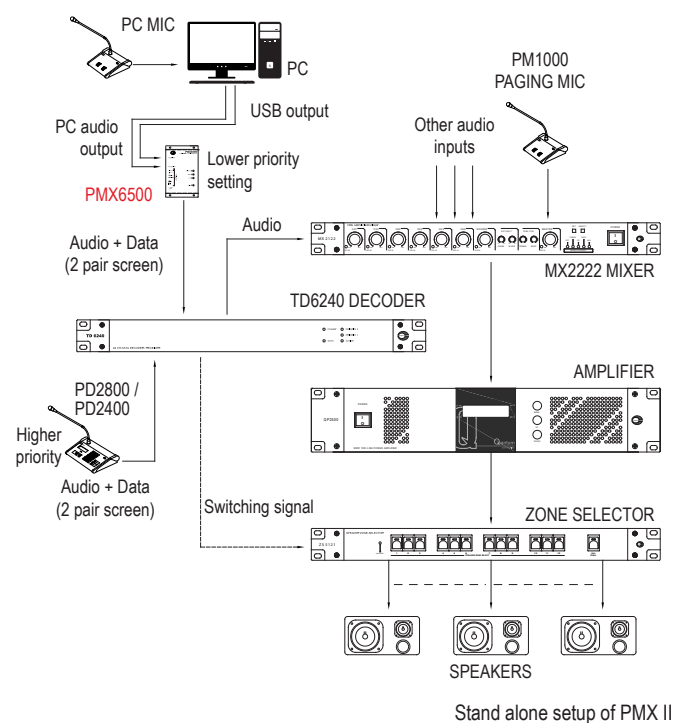

Main Page

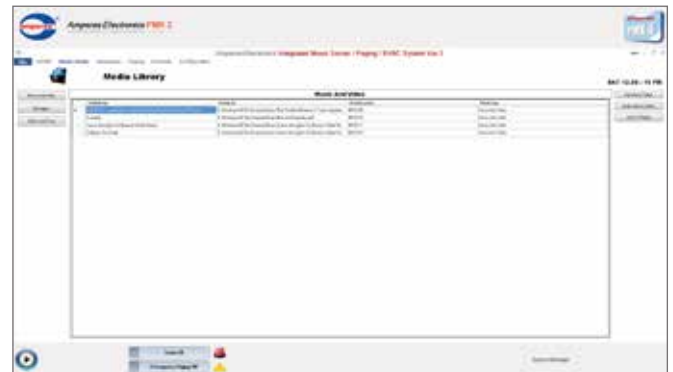


Media Library

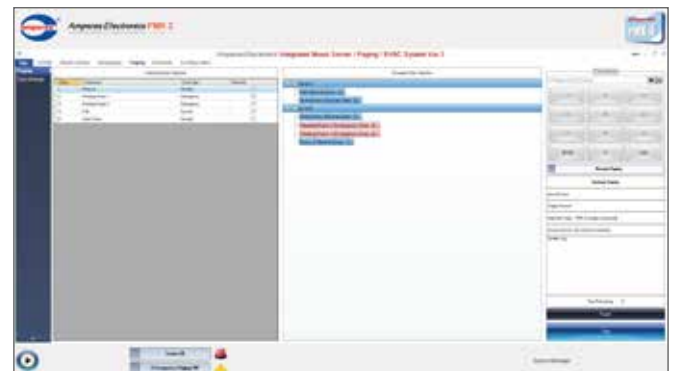

PC Paging Interface

External Device Status

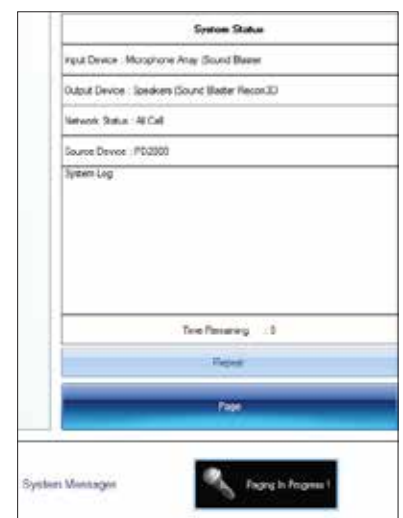

PACKING INFO:



- Software CD
- PMX II stand alone only:-
- PMX6500 USB to RS485 converter
- W x H x D : 210 x 175 x 105 mm
- Weight : 1.05 kg