INSTALLATION GUIDE CS515 5" 6W 100V CEILING SPEAKER

Introduction


CS515 is a general purpose 5" 6W 100V line ceiling speakers which comes complete with ABS honeycome grille and back enclosure. It is suitable for BGM and Paging application and suitable for rust prove environment.


Among places suitable are:

- Hotel corridors and rooms
- Offices
- Shopping centres
- Cruise ships / ferries
- Seaside buildings

The main feature is its elegant looking low profile ABS grille which shall be able to withstand against corrosion by chemical, sea water or high humidity environment. The honeycomb shaped ABS grille is available in standard white glossy finishing and can be customised to any colour required.

Guide to Installation

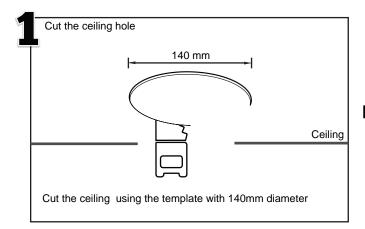





Connect the incoming speaker cable to the cables from the speaker according to the required power rating, as:-


- Black red ~ 6W
- Black yellow ~ 3W Black Green ~ 1.5W


Cut off the loose cable's conductor to avoid shorting or tape them with insulation tape.

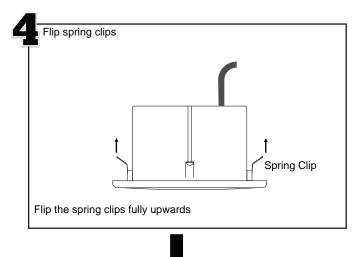



Upon completion of cable termination, the connector can be inserted inside the conduit, and thereafter slot in the conduit into the speaker hole at the back enclosure. The overall installation would look neat.





The installation is complete as shown. If is required to uninstall the speaker, use a flat screw driver to pull it down the speakers edge

Please do it carefully as not to damage the ceiling. The grille can be opened for inspection by turning it clockwise.

