

**PD1900** Digital Touch Screen Paging Microphone

PD1900 features 7" capacitive touch screen panel with 800 x 480 pixel resolutions and multiple attractive user interfaces, providing contemporary outlooks and with easy to use design.

It is compatible with all zone decoders, IP Paging client ( iPX5151 ) and MxP2288 Matrix Controller. All settings are done via the user friendly UI such as volume, priority setting, naming of unit etc.

Setup a PD1900 in your reception, it shall definitely bring up the value of your establishment.




**Features**

- Illuminated gooseneck microphone upon activation
- 7" capacitive colour touch screen panel with 800 x 400 resolutions
- Multiple user friendly interfaces
- Zone groupings
- Unit name setting for easier identifications
- Built in chime / siren with tone setting

**Technical Specifications**

Operating voltage	24V DC via EX2800 with local power adaptor
Power consumption ( 24V DC )	1.3 W
Zone selection	Numerical keypad with Grouping, All Call
Microphone	Gooseneck condenser capsule, cardioid
Output impedance	600 Ohm
Output level	1.2 V balanced line out ( +4 dBU )
Output controls	Chime, mic volume
<hr/>	
Data connections	RS485 ; 19.2 kbps
Cabling to decoder	2 pair screen : 22 AWG / Cat 5e
Recommended operating distance	300 m, subjected to cable size
Compatible interface device	MxP2288, TD6240, TD6080, TD6400, iPX5155
Chime	Programmable 4 tone Up / Down
Indicators	Zone, power, audio, data, gooseneck mic ring LED
Displays / panel	7" capacitive touch screen, 800 x 480 pixels
Frequency response	100 - 12 kHz 2 1 kHz +/- 3 dB
S/N ratio	> 65 dB @ 1 kHz
<hr/>	
Gooseneck mic length	370 mm
Dimensions ( W x H x D )	230 x 192 x 65 mm ( excluding mic )
Weight	0.95 kg

Various GUI, providing user friendly setup

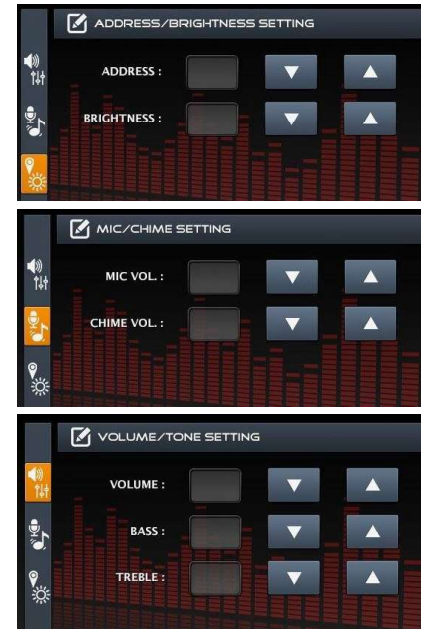

**Packing information**

Carton size : 525 (L) x 270 (W) x 85 (H) mm  
 Gross weight : 2.10 kg ( incl adaptor )  
 1 unit per carton

