

Introduction

BS508 is a surface mount / box speaker with 5" driver with power tapping at 1, 3, 6 and 10W. It is built with quality ABS material for ruggedness and solid sound reproduction.


It has lower profile enclosure as compared with other conventional box speakers, thereby able to blend to most installation places.

BS508 has been tuned to deliver optimum sound for BGM, Paging and EVAC purposes with emphasis on human voice.


Guide to Installation




1 Mark the wall with the template, and drill hole with wall plug inserted.

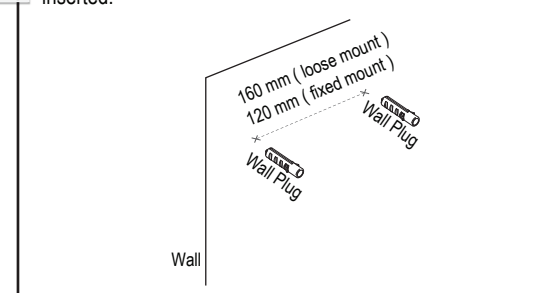

2 Gently remove the speaker mount and grille.

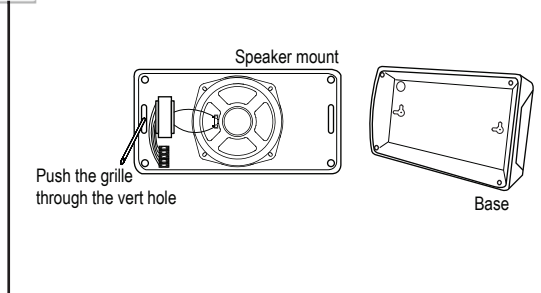


4 Terminate incoming cable to the snap in connector according to the power required at the speaker assembly.

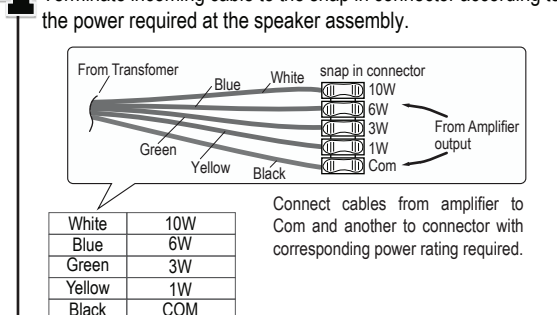


White	10W
Blue	6W
Green	3W
Yellow	1W
Black	COM

Connect cables from amplifier to Com and another to connector with corresponding power rating required.


3 Break the appropriate cable opening and mount the speaker base to the wall with incoming cable inside.

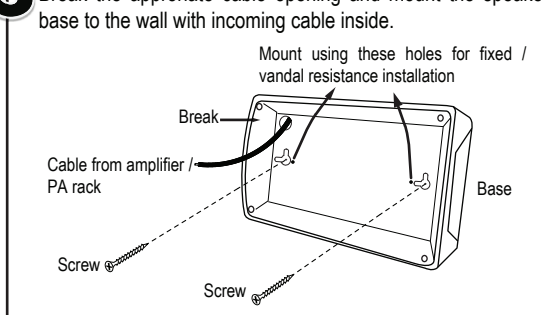

5 Mount the speaker assembly to the base.

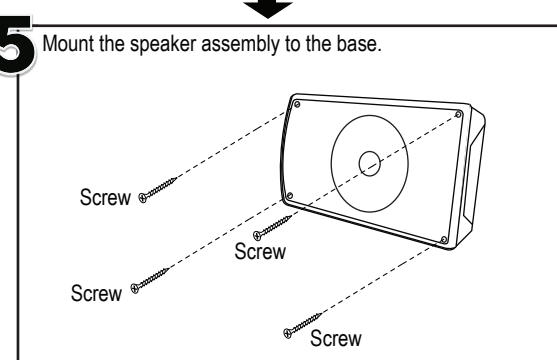

6 Insert the speaker grille to the speaker assembly. Gently insert it to avoid damaging the grille.

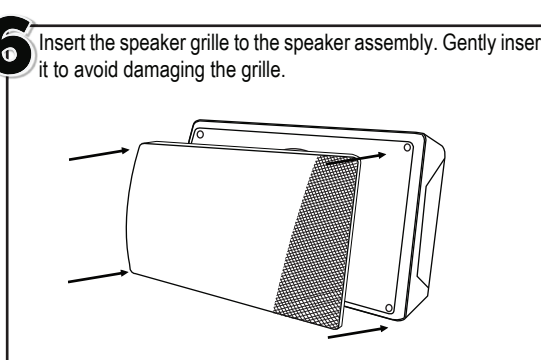

Template for speaker mounting

