



Introduction

CS343 is driven by a 4" dual cone speaker with built in matching transformer of dual taps of 3 and 6W 100V line.


Made of quality ABS enclosure and aluminum grille, it is suitable for high humidity areas, such as bathrooms and salty environment. Though compact in size, it delivers satisfactory sound reproduction with high SPL level, good for listening pleasure as well as paging clarity.

Technical Specifications


Speaker		Transformer	
Power rating	6W 100V line nominal (max 10W)	Tapping (100V line)	3 / 6W
Diameter	4" (100 mm)	Primary impedance (Ohm)	3.3 K / 1.67 K
Cone type	Dual Cone	Secondary impedance (Ohm)	8 Ohm
Impedance	8 Ohm		
Freq Response (-5dB)	150 - 18 KHz		
SPL @ 1W / m (+/-3dB) ; 1 KHz	90 dB		
Magnet Weight	3 oz		

Guide to Installation


1 : Ceiling hole dimension

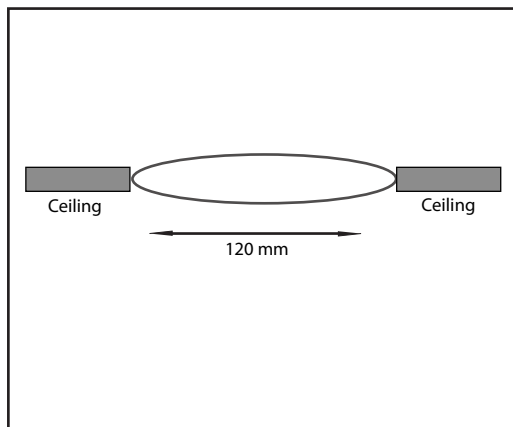

2 : Install the speaker to ceiling

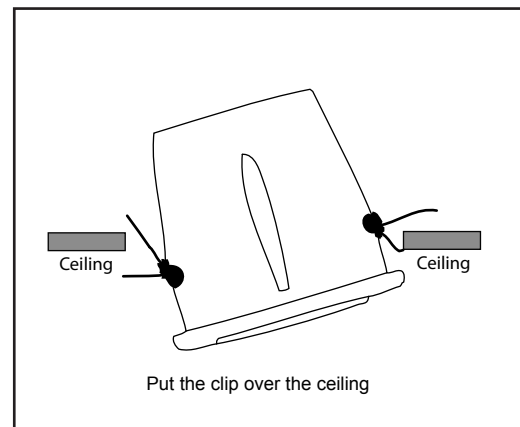

3 : Push the speaker

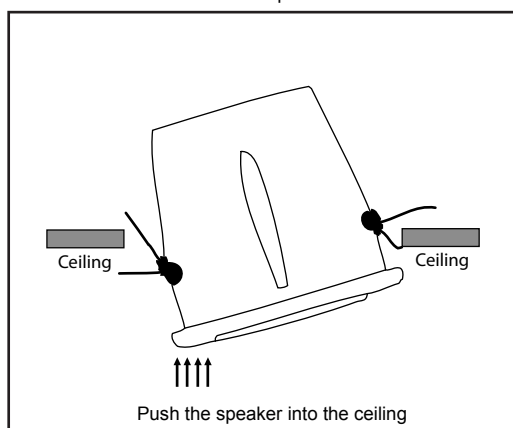

4 : Installation finish

