


Introduction

FS640 is a full range speaker with 6" of driver size complete with matching transformer, selectable power switch and mounting bracket.

Suitable for foreground soft music such as restaurants, shops and general sound reinforcement in meeting room, corridors, etc.

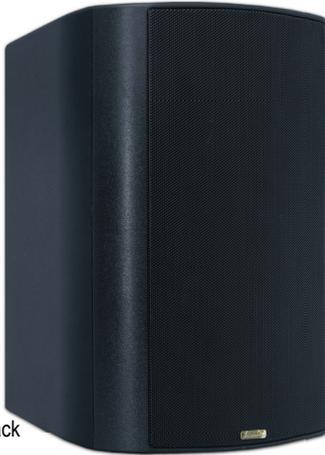

Available in White and Black

Technical Specifications

Speaker

Power rating	40W 100V line
Diameter	6" (150 mm)
Speaker type	2 way speaker with tweeter
Impedance	8 Ohm
Freq response @ 1kHz +/- 3dB	70 - 18 kHz
SPL @ 1W / m (+/-3dB) 1 KHz	88 dB

Transformer

Tapping (100V line)	2.5 / 5 / 10 / 20 / 40W
Primary impedance (Ohm)	4K / 2K / 1K / 500 / 250 / 8
Secondary impedance (Ohm)	8

Physical


Grille / enclosure	ABS enclosure with metal grille
Overall size w bracket (WxHxD)	215 x 295 x 220 mm
Weight	3.70 kg
Colour	White and Black

Packing Information


Carton box dimensions	470 (W) x 420 (H) x 330 (D) mm
Weight	16.40 kg
Packing quantity	4 Uts

Installation Guide

1 Install wall mount bracket to wall.

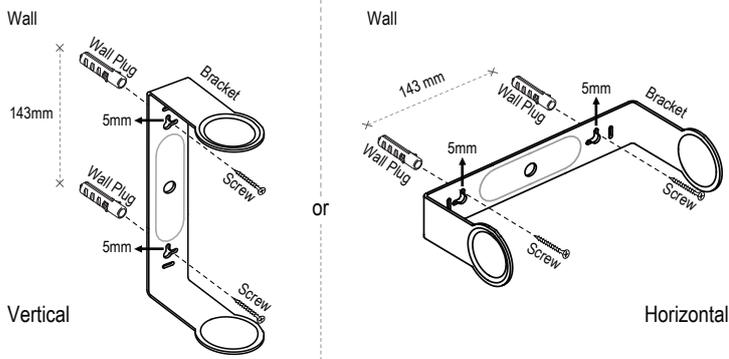


2 Set the power input.

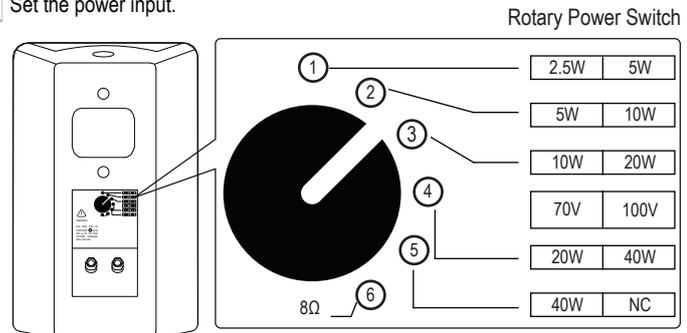

Before install the speaker, adjust the power rating of the unit, to suit the site requirement.

Turn the rotary switch (on the rear side of the speaker) to set it to the desired input impedance using a slotted screwdriver.

3 Terminate speaker cable to speaker.

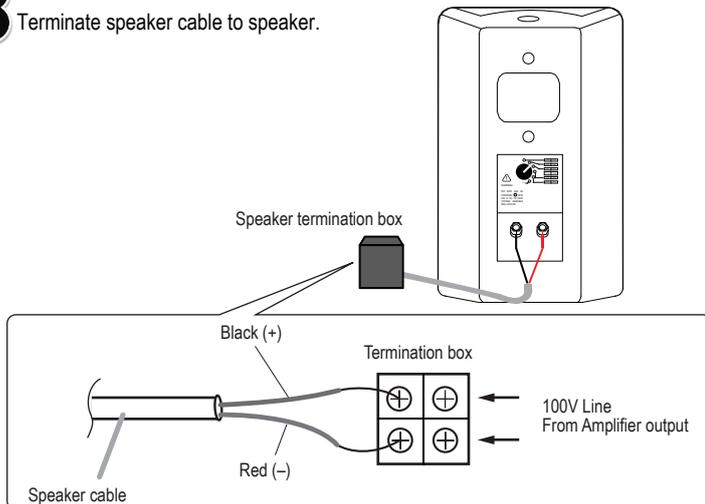

4 Install speaker to the bracket.

