

**CL900 Series Slim Column Speakers**


Built ruggedly with aluminum die extrusion housing and is available in 5 power rating of 10 / 20 / 40 / 60 and 80W 100V line with dual power tapping. Suitable for classrooms, hyper markets, mosques, ballroom, factories, passenger terminals, exhibition areas etc.

**Features**

- Slim design to match environment or to be hidden from view
- Multi-way mounting bracket for CL 902, 904, 908
- Epoxy coated grille
- Engineered for speech and BGM clarity

**Packing information**

CL902 : 255(L) x 235(W) x 170(H) mm : 2.70 kg : 2 uts per carton	CL912 : 830(L) x 245(W) x 170(H) mm : 7.80 kg : 2 uts per carton
CL904 : 400(L) x 235(W) x 155(H) mm : 3.90 kg : 2 uts per carton	CL916 : 1160(L) x 240(W) x 195(H) mm : 13.00 kg : 2 uts per carton
CL908 : 605(L) x 245(W) x 175(H) mm : 6.20 kg : 2 uts per carton	

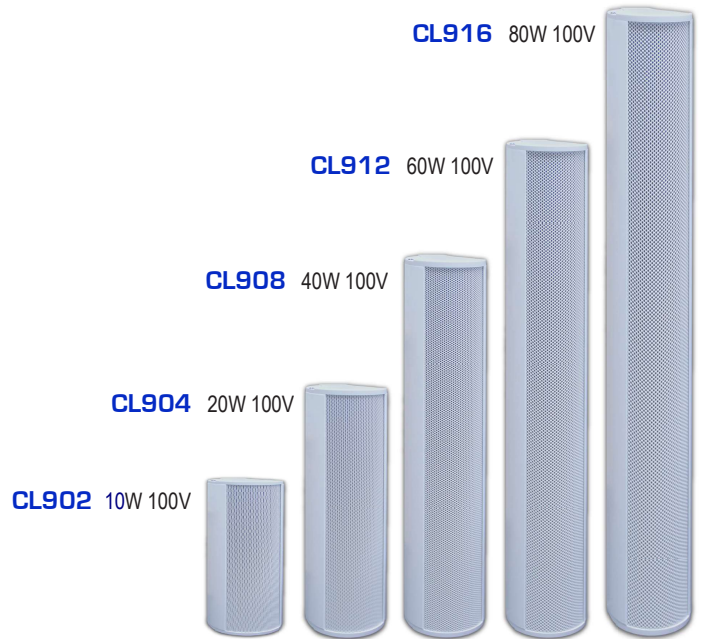

**Technical Specifications**

	CL902	CL904	CL908	CL912	CL916
Power rating	10W 100V	20W 100V	40W 100V	60W 100V	80W 100V
Speaker components	2 x 2"	4 x 2"	8 x 2"	12 x 2"	16 x 2"
Transformer tapping(100V)	6 / 10W	10 / 20W	30 / 40W	50 / 60W	70 / 80W
Primary impedance (Ohm)	1.6K / 1K	1K / 500	330 / 250	200 / 166	143 / 125
SPL descriptions	87 ± 3dB				
Frequency response @ 1KHz +/-3dB	200 - 16 KHz	200 - 17 KHz	240 - 16 KHz	220 - 17 KHz	220 - 18KHz
Dimension (WxHxD)	79 x 190 x 89 mm	79 x 350 x 89 mm	79 x 567 x 89 mm	79 x 782 x 89 mm	79 x 1128 x 89 mm
Material	Aluminum body ; powder epoxy metal grille				
Weight with bracket (kg)	1.10	1.50	2.50	3.20	5.80

**CL700 Series Full Range Column Speakers**

**New**  
Pre-liminary Info

CL700 Series shall be available in variants of 40 and 80W 100V line with variable power taps. It is built ruggedly with aluminum housing and rust free front grille, suitable for both indoor and outdoor installations.

They are driven by powerful 4" drivers and have been carefully designed and tuned to deliver low frequency and extra emphasis on the mid range, which is important to deliver human voice.

**Technical Specifications**

	CL740	CL780
Power rating	40W 100V	80W 100V
Speaker components	2 x 4" + 1" tweeter	4 x 4" + 1" tweeter
Transformer tapping(100V)	30 / 40 W	70 / 80 W
Primary impedance (Ohm)	330 / 250	143 / 125
SPL descriptions	90 ± 3dB	
Frequency response @ 1KHz +/-3dB	100 - 16 KHz	100 - 17 KHz
Dimension (WxHxD)	130 x 310 x 140 mm	130 x 620 x 140 mm
Material	Aluminum body, powder epoxy coated grille	
Weight with bracket (kg)	2.7	6.0



**CL740**