


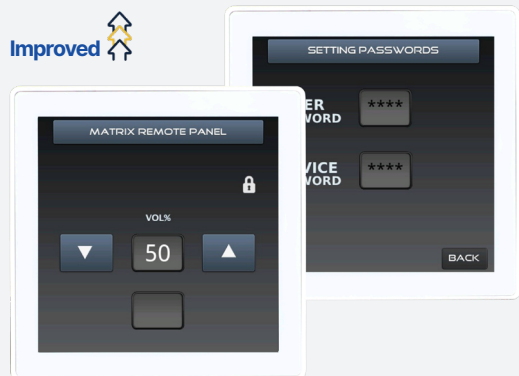

RP1104

MxP2288 Touchscreen Remote Control Panel

RP1104 is an improvised 86 x 86mm wall-mounted touchscreen remote control panel for MxP2288 matrix controller, providing easy control of music, volume, and tone for individual zones.


It is ideal for hotels, restaurants, and venues requiring aesthetically pleasing panel for audio controls. Available in black upon request.

Key Features

- **Three-level password protection** (User, Service, Admin)
- **Customizable startup logo** for branding
- **RS485 communication** for stable control
- Supports **daisy-chain installation**
- **Connects to MxP2288** via Cat5e/6 cable

Technical Specifications

Power source	24V DC via MxP2288 or external adapter
Power consumption	68mA (1.7W) or 41mA (0.99W) at screen saver
LCD panel	4" diagonal capacitive touchscreen
Data communication	RS485, 19.2 kbps
Cabling to MxP2288	Cat5e/6 cable or 4C screen (data & power)
Cable distance	200m
Max device per circuit	4 units of RP1104 via Cat5e/6 cable (0.41A drawn at max distance)
Controls	Volume, BGM source, tone control, and channel selection
Dimensions (W x H x D)	86 x 86 x 40 mm
Colour	White
Net weight	135g



EX1103

Paging Microphone Extender

EX1103 is an optional accessory for multi-point paging with MxP2288 matrix controller. It allows multiple paging microphones to be looped and connected to the controller's microphone input for reliable complex paging systems.

Application Schematics for MxP2288

