

INPUT SOURCES & CONTROLS

CM1400 Chime and Siren Tone Generator




CM1400 offers 5 chimes and 2 siren tones with selectable balanced and unbalanced line output. Activation of chime shall be from front switches or via remote triggering terminals, enabling the unit to be linked to external sensors or triggering system such as alarm panel, remote mic or emergency switch. Siren has priority over chimes.

Technical Specifications

Operating voltage	24V DC via PS9400 PSU
Power consumption	72 mW
Chime types	4 tone up, 4 tone down 2 tones Ringing bell Westminster
Siren type	Constant 8 kHz Wavy siren
External activation	Dry contact
Output	Line +4dBu balanced / unbalanced
Output impedance	10 k Ohm
Dimensions (W x H x D)	482 x 44 x 180 mm
Weight	1.85 kg

Features

- 5 types of chime and 2 siren
- Adjustable output volume
- Selectable output as balanced or unbalanced line
- Front panel switch activation or via remote trigger
- Custom tone service available

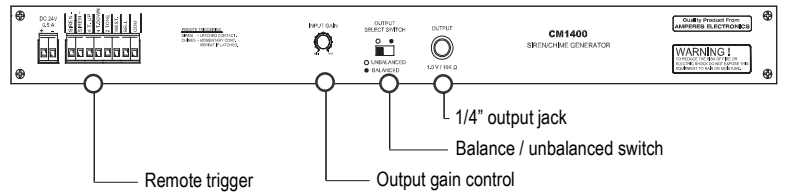


Packing information

Carton size : 555 (L) x 295 (W) x 95 (H) mm
Gross weight : 2.40 kg
1 unit per carton

TI6100 Telephone Paging Interface

TI6100 is an interface for PABX system to PA, allowing paging from any keyphone extension to speakers. It is suitable for analogue / hybrid keyphone systems.

Application Schematic

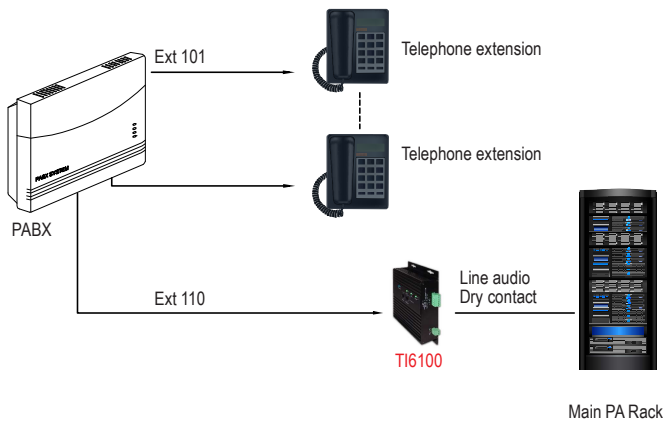

Packing information

Carton size : 155 (L) x 105 (W) x 125 (H) mm
Gross weight : 0.9 kg
1 unit per carton

