

Built ruggedly with aluminum die extrusion housing and available in 5 power rating of 10 / 20 / 40 / 60 and 80W 100V line with dual power tapping. Suitable for classrooms, hyper markets, mosques, ballroom, factories, passenger terminals, exhibition areas etc.

Features

- ▶ Slim design to match environment or hidden from view
- ▶ Engineered for speech and BGM clarity

Packing information


CL902 : 255(L) x 235(W) x 170(H) mm
: 2.70 kg
: 2 uts per carton

CL904 : 400(L) x 235(W) x 155(H) mm
: 3.90 kg
: 2 uts per carton

CL908 : 605(L) x 245(W) x 175(H) mm
: 6.20 kg
: 2 uts per carton

CL912 : 830(L) x 245(W) x 170(H) mm
: 7.80 kg
: 2 uts per carton

CL916 : 1160(L) x 240(W) x 195(H) mm
: 13.00 kg
: 2 uts per carton

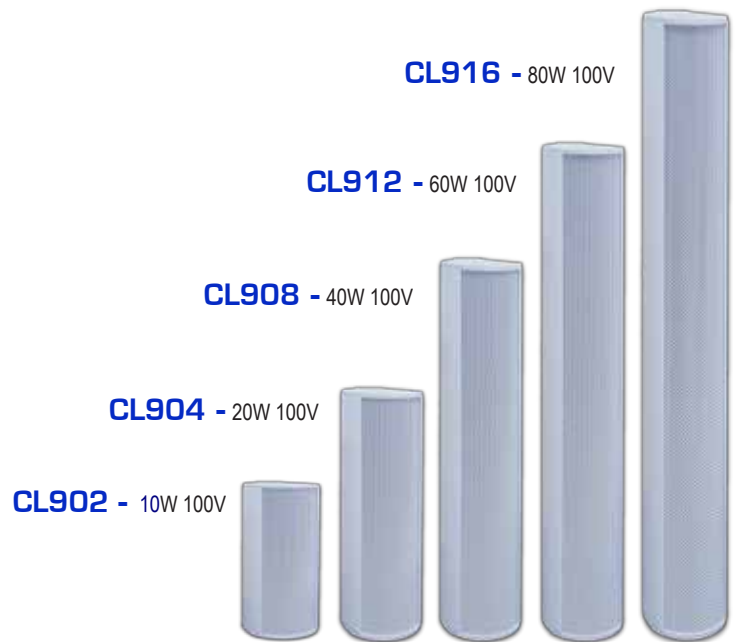

Technical Specifications

| | CL902 | CL904 | CL908 | CL912 | CL916 |
|----------------------------------|---|------------------|------------------|------------------|-------------------|
| Power rating | 10W 100V | 20W 100V | 40W 100V | 60W 100V | 80W 100V |
| Speaker components | 2 x 2" | 4 x 2" | 8 x 2" | 12 x 2" | 16 x 2" |
| Transformer tapping(100V) | 6 / 10W | 10 / 20W | 30 / 40W | 50 / 60W | 70 / 80W |
| Primary impedance (Ohm) | 1.6K / 1K | 1K / 500 | 330 / 250 | 200 / 166 | 143 / 125 |
| SPL descriptions | 87 ± 3dB | | | | |
| Frequency response @ 1KHz +/-3dB | 200 - 16 KHz | 200 - 17 KHz | 240 - 16 KHz | 220 - 17 KHz | 220 - 18KHz |
| Dimension (WxHxD) | 79 x 190 x 89 mm | 79 x 350 x 89 mm | 79 x 567 x 89 mm | 79 x 782 x 89 mm | 79 x 1128 x 89 mm |
| Material | Aluminum with powder epoxy metal grille | | | | |
| Weight with bracket (kg) | 1.10 | 1.50 | 2.50 | 3.20 | 5.80 |

20 - 40W 100V Line Column Speaker | CH700

Technical Specifications

| | CH720 | CH740 |
|------------------------------|--------------------------------|--------------------|
| Power rating | 20W 100V | 40W 100V |
| Speaker component | 2 x 4" | 4 x 4" |
| Tapping (100V line) | 10 / 20W | 20 / 40W |
| Primary impedance (Ohm) | 1 K / 500 | 500 / 230 |
| Secondary impedance (Ohm) | 8 | |
| Freq response (+/- 3dB) | 85 ~ 15 KHz | 75 ~ 15 KHz |
| SPL @ 1W / m (+/- 3dB) 1 KHz | 91 dB | 95 dB |
| Grille / enclosure | Aluminum / metal grille | |
| Overall size (WxHxD) | 145 x 400 x 100 mm | 145 x 605 x 100 mm |
| Weight (kg) | 3.2 | 4.6 |
| Colour | Dark grey / front black grille | |

Packing information

CH720 : 435 (L) x 310 (W) x 225 (H) mm
: 7.20 kg
: 2 uts per carton

CH740 : 630 (L) x 315 (W) x 225 (H) mm
: 10.50 kg
: 2 uts per carton

Built ruggedly with aluminum die cast housing and available in 2 power rating of 20 and 40W 100V line with dual power tapping. Suitable for classrooms, hyper markets, mosques, etc.

