

VR7600

Rack Mounted Zone Volume Controller


SPEAKER PATCH / VOLUME CONTROLS



VR7600 is a rack mounted, 6 zone volume controller which is normally installed at main rack to enable centralized zone volume settings. They are available in variants of 50W, 100W or 150W 100V as standard ratings. Customized zone rating is also available upon request.

- **Customized** zone rating option available
- Built in **overriding** relay for emergency volume bypass
- **6 zones** with 50 / 100 / 150W 100V line rating for each zone
- Suitable for **4 wire system** : 2 for 100V audio & 2 for 24V DC overriding

Application Schematic

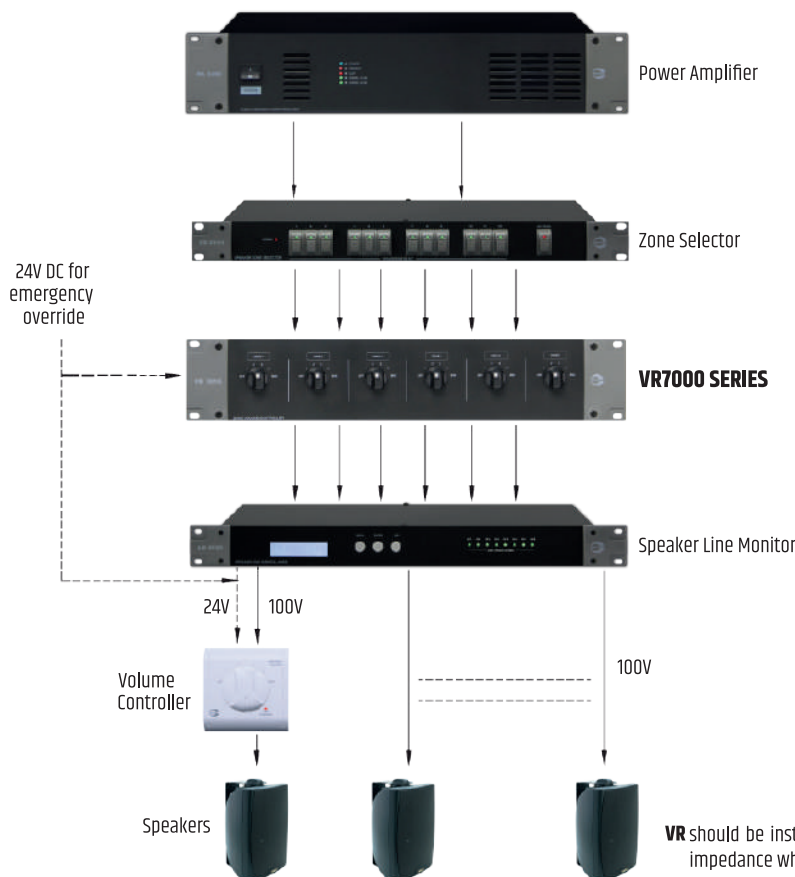

Technical Specifications

VR7605 / VR7610 / VR7615

Power rating	50 / 100 / 150W 100V line / zone
Overriding voltage	24V DC
Overriding current	15mA per channel
Attenuation	6 steps incl. OFF
Attenuation / step	6 dB / step
Attenuation method	Auto transformer
Dimension (W x H x D)	482 x 88 x 60 mm
Weight	2.10 / 3.10 / 3.20 kg

VR should be installed before LS4808 / 4816 to avoid false fault detection due to variation of impedance whenever volume is adjusted.

Packing Information

Carton size : 560 (L) x 300 (W) x 175 (H) mm
Gross weight : 5.50 / 7.10 / 7.60 kg
2 units per carton



Packing Information